




Jilly linear – The versatile light for modern work

An independent design for efficient and ergonomic light in offices

Jilly recessed luminaires represent a particularly efficient solution for standard-compliant office workplace lighting. The concise appearance with striking anti-glare louvre set Jilly apart from conventional office luminaires. The lighting technology combines a highly efficient lens system with an anti-dazzle louvre for visual comfort and luminous efficacy at the same high level.

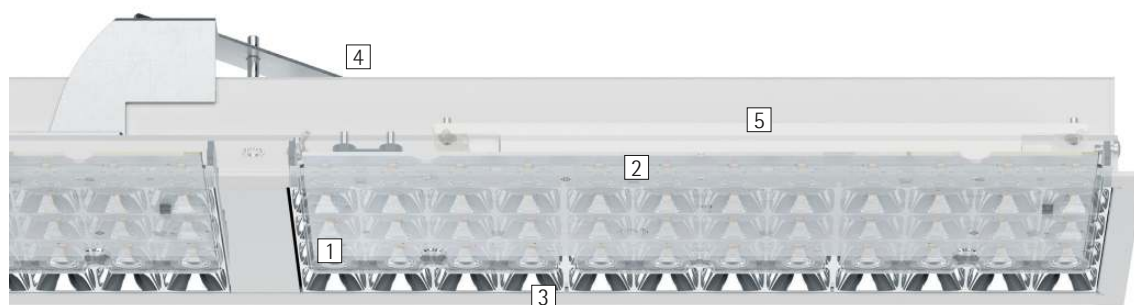

Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

1 ERCO lens system

- Made of optical polymer
- Light distributions: extra wide flood or oval wide flood

2 ERCO LED-module

- Mid-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)

3 Louvre

- Polymer, black lacquered or aluminium vaporised, silver, mirror-finish

4 Housing

- Aluminium profile, powder-coated white
- Fixing for ceiling thicknesses of 1-30mm
- Covered mounting detail

5 Control gear

- Switchable or DALI dimmable

Variants on request

- Anti-glare louvre: gold matt, silver matt, champagne matt or copper matt-coated and other colours
 - Housing: 10,000 further colours
- Please contact your ERCO consultant.



Design and application:
www.erco.com/jilly-linear

Jilly linear Recessed luminaires



Suitable for office workstations

ERCO develops luminaires with the specifications of good glare control and high visual comfort. UGR values are used as support for purely norm-referenced lighting. With downlights though this should not be carried out using 'blanket' values, but should be implemented according to the individual arrangement of luminaires in the room.



Louvres for efficient visual comfort

A louvre is designed to restrict the view into the luminaire, achieving efficient visual comfort with an emission angle of 90°. An anti-glare louvre available in black or silver enables the luminaire to blend with the material and colour of the ceiling.

Shallow recess depth

For compact mounting situations, ERCO has developed luminaires with a shallow recess depth to provide excellent light quality in areas with limited installation space.

Special characteristics

	For office workstation lighting from UGR 14.0
	Improved visual comfort
	Shallow recess depth



ERCO mid-power LEDs



Efficient lens system



Different light colours



Excellent thermal management



EMC-optimised



Tool-free mounting




Switchable



DALI dimmable


Jilly linear Recessed luminaires – Luminaire arrangement

Downlights
Extra wide flood

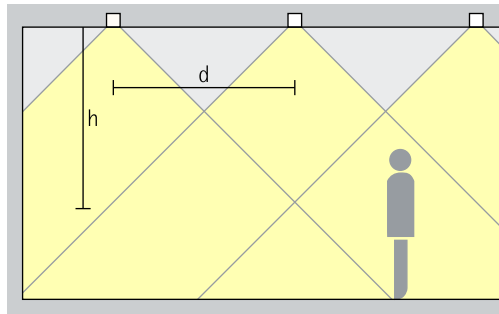

General lighting
For the uniform illumination of office workplaces, the luminaire spacing (d) between two Jilly downlights may be up to 1.5 times the height (h) of the luminaire above the working plane (rough guide).


Arrangement: $d \leq 1.5 \times h$

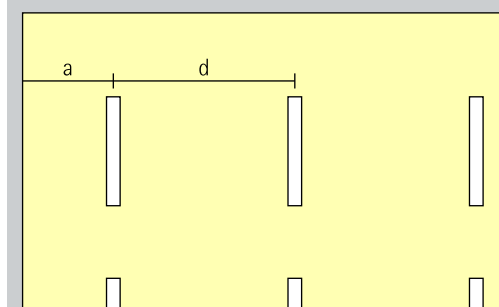

The wall offset should be half the luminaire spacing.


Arrangement: $a = d / 2$

Downlights oval wide flood
Oval wide flood

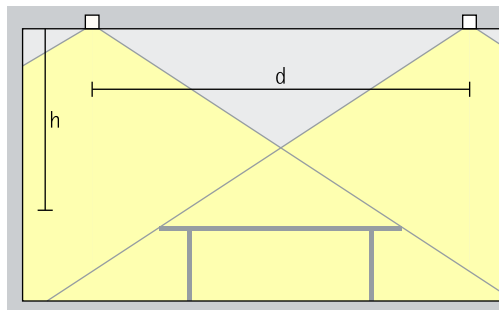

General lighting
To achieve high uniformity and good facial recognition when illuminating office workplaces, the luminaire spacing of Jilly downlights with oval wide flood light distribution (d) can be up to 1.5 times the height (h) of the luminaire above the working plane.


Arrangement: $d \leq 1.5 \times h$

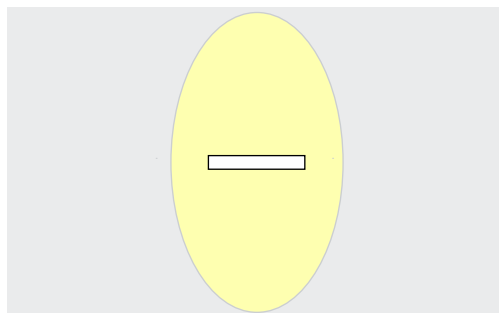

Jilly linear, with oval wide flood distribution of light transverse to the luminaire, orients itself to luminaire alignment as highly proven for office applications.

Jilly linear Recessed luminaires







Construction size 1125mm





LED module
Maximum value
at 4000K CRI 82

36W/6735lm



Light colour

	2700K CRI 92		3500K CRI 92
	3000K CRI 82		4000K CRI 82
	3000K CRI 92		4000K CRI 92

Light distribution

Downlights	Downlights oval wide flood
 Extra wide flood	 Oval wide flood

Control

	Switchable
	DALI

Colour (louvre)

	Silver
	Black



Article numbers and planning data:
www.erco.com/017876

Design and application:
www.erco.com/jilly-linear



