Lightscan – Radiance in digital form

Lightscan for sophisticated lighting tasks in outdoor areas
Lightscan sets accents in outdoor lighting. High luminous fluxes enable the illumination of buildings, walls and objects even if they are very high or if there are only a few possibilities for floodlight mounting positions. Different distributions ensure that the light only reaches where it is needed. Lightscan is extremely weatherproof and blends harmoniously into its surroundings with its slender silhouette. With its mounting accessories Lightscan is predestined for different requirements within the application. The maintenance-free optoelectronics protect resources thanks to their high efficiency and also reduce operating costs.

Structure and characteristics
The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

1 ERCO Spherolit lens
- Light distributions: narrow spot, spot, flood, wide flood, extra wide flood, oval flood or wallwash
- Oval flood 360° rotation

2 ERCO LED-module
- High-power LEDs: warm white (3000K) or neutral white (4000K)
- Collimating lens made of optical polymer

3 Housing
- Graphit m
- Corrosion-resistant cast aluminum, No-Rinse surface treatment
- Double powder-coated
- Optimized surface for reduced accumulation of dirt
- Cover frame: powder-coated black
- Safety glass

4 Control gear
- Switchable or 0-10V dimmable

5 Mounting plate and hinge
- Corrosion-resistant cast aluminum, No-Rinse surface treatment or polymer
- Graphite m, double powder-coated or coated
- 90° tilt, 300° or 360° rotation
- Internal wiring

Suitable for wet locations (IP65)
Dust-proof and water jet-proof

Variants on request
- High-power LEDs: 3000K CRI 97 or 2700K, 3500K, 4000K with CRI 92
- Housing: 10,000 further colors

Please contact your ERCO consultant.

Design and application:
www.erco.com/lightscan

Large lumen packages for very high illuminances
The attention of the viewer can be focused via contrasting accents. ERCO offers high-performance luminaires with large lumen packages for this purpose.

Oval flood freely rotatable
The round oval flood Spherolit lens can be freely rotated with all luminaires to optimally align the light to various objects.



Various construction sizes
The luminaires in the ERCO product range cover a wide variety of lumen categories and therefore offer an appropriate solution for a large number of lighting tasks.

Special characteristics

Large lumen packages for very high illuminances

Oval flood, freely rotatable

Various construction sizes

ERCO high-power LEDs

Efficient Spherolit technology

Different light distributions

Different light colors

Excellent thermal management

EMC-optimized

Degree scale for good adjustability

Pivotable through 90°
Lockable

Wet location

Accessory for mounting variants

Switchable

0–10V dimmable

Lightscan Projectors – Luminaire arrangement

Projectors
Narrow spot, Spot, Flood

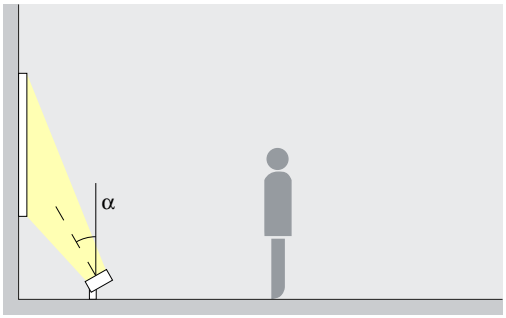

Accentuation
The ideal angle of tilt (α) for accent lighting with Lightscan projectors is around 30°. This emphasises the three-dimensionality of architectural details, sculptures or trees, without distorting the spatial impression with excessive shadowing.

Arrangement: α = 30°

Floodlights
Wide flood, Extra wide flood, Oval flood

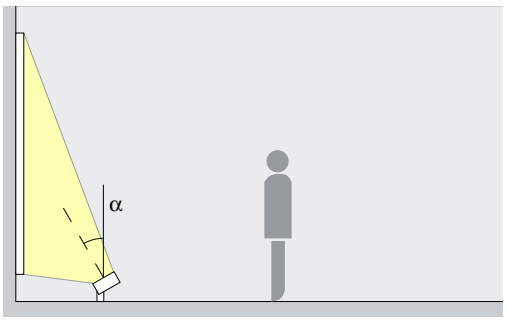

Washlighting
Lightscan projectors ensure uniform floodlighting of long wall surfaces, columns or trees. The ideal angle of tilt (α) for this is around 30°

Arrangement: α = 30°

Lens wallwashers
Wallwash

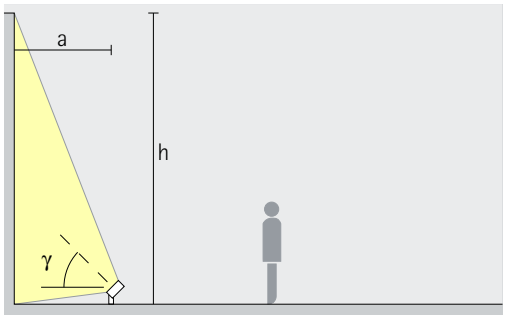

Wallwashing
Uniform vertical illuminance in the outdoor area defines spatial borders. Here, the distance (a) of Lightscan lens wallwashers from the wall should be around one third of the room height (h). This results in an angle of tilt (γ) of approx. 55°.

Arrangement: a = 1/3 x h or
γ = 55°

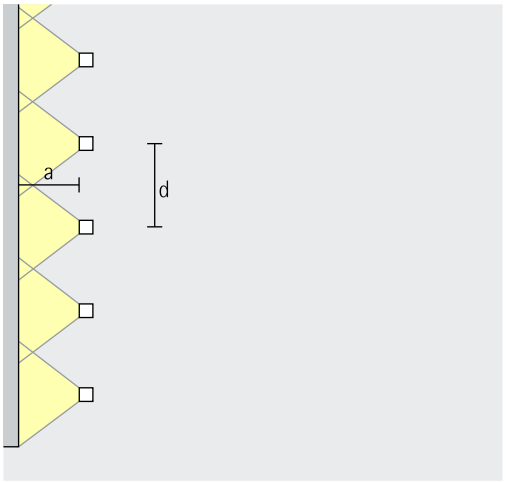

For good longitudinal uniformity, the spacing (d) of Lightscan lens wallwashers may be up to 1.2 times the offset from the wall (a).

Arrangement: d ≤ 1.2 x a

The optimal wall offset and luminaire spacing for each product are indicated in the wallwasher tables in the catalogue and the product data sheets.

Incheon International Airport Terminal 2. Architecture: Heerim Architects & Planners, Seoul. Lighting design: P2LEDcube, Seoul. Photography: Jackie Chan, Sydney.

Lightscan Projectors, floodlights, wallwasher

Construction size



4 3/8"



5 7/16"

LED module
Maximum value at 4000K CRI 82

6W/825lm	2W/275lm (Narrow spot)

12W/1650lm	8W/1100lm (Narrow spot)
19W/2460lm	
24W/3300lm	

Light color

2700K CRI 92 *	3500K CRI 92 *
3000K CRI 92	4000K CRI 82
3000K CRI 97 *	4000K CRI 92 *

2700K CRI 92 *	3500K CRI 92 *
3000K CRI 92	4000K CRI 82
3000K CRI 97 *	4000K CRI 92 *

Light distribution

Projectors	Floodlights
Narrow spot	Wide flood
Spot	Extra wide flood
Flood	Oval flood
	Lens wallwashers
	Wallwash

Projectors	Floodlights
Narrow spot	Wide flood
Spot	Extra wide flood
Flood	Oval flood
	Lens wallwashers
	Wallwash

Control

	Switchable **
0–10V	0–10V

0–10V	0–10V

Color (housing)

	Graphit m
	10,000 colors *

	Graphit m
	10,000 colors *

Accessories

	Ground spike		Mounting plate		Clamping plate
	Ground socket		Cantilever arm		Adapter piece
	Concrete anchor		Attachment		Spacer



9 7/8"

48W/6600lm	18W/2475lm (Narrow spot)

	2700K CRI 92 *		3500K CRI 92 *
	3000K CRI 92		4000K CRI 82
	3000K CRI 97 *		4000K CRI 92 *

Projectors	Floodlights
Narrow spot	Wide flood
Spot	Extra wide flood
Flood	Oval flood
	Lens wallwashers
	Wallwash

0–10V	0–10V

	Graphit m
	10,000 colors *



11 13/16"

72W/9900lm	32W/4400lm (Narrow spot)

	2700K CRI 92 *		3500K CRI 92 *
	3000K CRI 92		4000K CRI 82
	3000K CRI 97 *		4000K CRI 92 *

Projectors	Floodlights
Narrow spot	Wide flood
Spot	Extra wide flood
Flood	Oval flood
	Lens wallwashers
	Wallwash

0–10V	0–10V

	Graphit m
	10,000 colors *

* available on request
** Only for narrow spot light distribution

Article numbers and planning data:
www.erco.com/014700-us

Design and application:
www.erco.com/lightscan

Lightscan Projectors, floodlights, wallwasher

Construction size



13 3/4"

LED module
Maximum value at 4000K CRI 82

96W/13200lm	42W/5775lm (Narrow spot)

Light color

2700K CRI 92 *	3500K CRI 92 *
3000K CRI 92	4000K CRI 82
3000K CRI 97 *	4000K CRI 92 *

Light distribution

Projectors	Floodlights
Narrow spot	Wide flood
Spot	Extra wide flood
Flood	Oval flood
	Lens wallwashers
	Wallwash

Control

0–10V	0–10V

Color (housing)

Graphit m
10,000 colors *

Accessories

Ground spike	Attachment
Ground socket	Clamping plate
Concrete anchor	Adapter piece
Mounting plate	Spacer
Cantilever arm	

Fori Imperiali, Rome. Lighting design: Vittorio Storaro, Rome; Francesca Storaro, Castel Gandolfo. Photography: Vittorio Storaro, Rome / Castel Gandolfo.

* available on request

Article numbers and planning data:
www.erco.com/014700-us

Design and application:
www.erco.com/lightscan

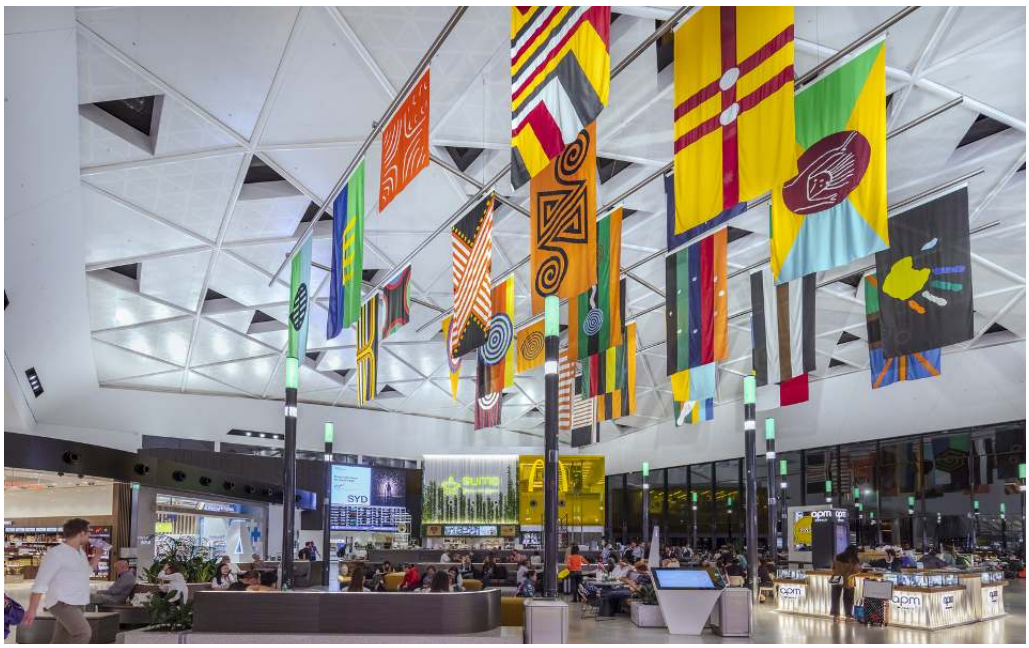

Kingsford Smith International Airport T1, Sydney. Architecture: Hassell Architects. Photography: Jackie Chan, Sydney.

Incheon International Airport Terminal 2. Architecture: Heerim Architects & Planners, Seoul. Lighting design: P2LEDcube, Seoul. Photography: Jackie Chan, Sydney.