




## Iku – Universal for architectural lighting

With Iku recessed luminaires, you can also realise ceiling-integrated lighting in environments exposed to weather or special stresses, for example in covered entrance areas or underpasses. The downlights and wallwashers harmonise perfectly with the other luminaires in the extensive Iku family – for lighting concepts that consistently combine interior and exterior. The separate control gear is permanently connected by a cable for easy installation. Optional DALI or Casambi Bluetooth interfaces offer digital connectivity. In Tunable White, Iku recessed luminaires

allow for HCL designs that take all "three A's" – activity, atmosphere and architecture – equally into account. The extremely high level of visual comfort also minimises unwanted emissions into the night-time environment.

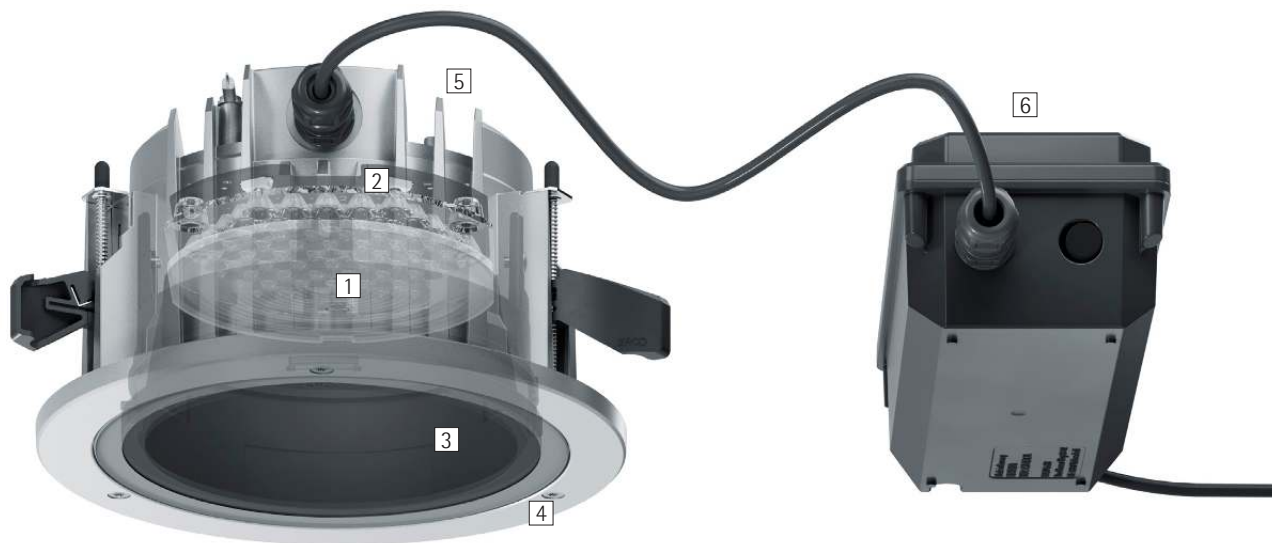

## Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

### 1 ERCO lenses

- Made of optical polymer
- Fresnel lenses: Wide flood, Extra wide flood or Oval flood
- Lens system: Wallwash

### 2 ERCO LED-module

- Mid-power LEDs (downlights) or High-power LEDs (wallwashers): warm white (3000K), neutral white (4000K) or Tunable white (2700-6500K)
- Downlights: collimating lens made of optical polymer

### 3 Anti-glare cone

- Silver-coated or black

### 4 Cover ring

- Corrosion-resistant cast aluminium, No-Rinse surface treatment
- Silver, double powder-coated
- Non-reflective safety glass

### 5 Housing

- Cast aluminium, powder-coated silver
- Mounting with 2- or 3-point contact and screw fastening, for ceiling thicknesses 1-30mm

### 6 Control gear

- Switchable, DALI dimmable or Casambi Bluetooth

### Variants on request

- Mid-power LEDs (downlights): 2700K, 3000K, 3500K or 4000K with CRI 92
- High-power LEDs (wallwashers): 3000K CRI 97 or 2700K, 3500K, 4000K with CRI 92
- Anti-glare cone: gold matt, silver matt, champagne matt or copper matt-coated and other colours

Please contact your ERCO consultant.



Design and application:  
[www.erco.com/iku-o](http://www.erco.com/iku-o)

## Iku Recessed luminaires




### Elegant light emission

The special geometry of the lens ensures a uniformly illuminated light opening with high visual comfort.




### Economical lighting

Iku downlights, offering up to 120lm/W, ensure superior efficiency for ambient lighting. Iku is the ideal choice for both new installations and refurbishments, adapting dynamically to your needs.



### Tunable white technology

Adjust the colour temperature dynamically or illuminate in colour. Luminaires with tunable white or RGBW allow for scenographic lighting concepts.



### Wide luminaire spacing with wallwashing

With ERCO's advanced lighting technology, Iku luminaires can be installed at up to 1.5 times the wall spacing, providing excellent light distribution.

### Special characteristics



Elegant light emission



>100lm/W



Tunable white



Wide luminaire spacing with wallwashing



ERCO Mid-power LEDs /  
ERCO High-power LEDs



Different light distributions



Different light colours



Excellent thermal management



EMC-optimised



Various construction sizes



Switchable



DALI dimmable




Casambi Bluetooth

## Iku Recessed luminaires – Luminaire arrangement

### Downlights


Wide flood, Extra wide flood

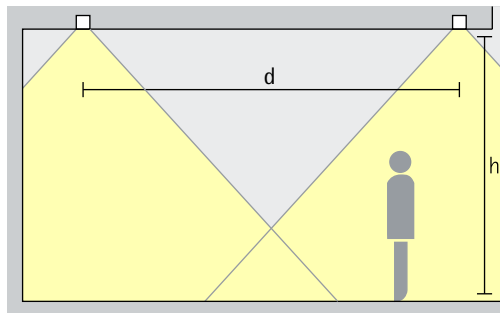

### General lighting

For uniform ambient lighting, the approximate distance (d) between two Iku downlights may be up to 1.5 times the height (h) of the luminaire above the working plane.

Arrangement:  $d \leq 1.5 \times h$

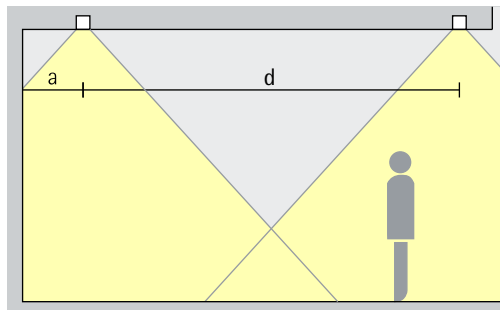


The wall offset should be half the luminaire spacing.

Arrangement:  $a = d / 2$

### Downlights oval flood

Oval flood

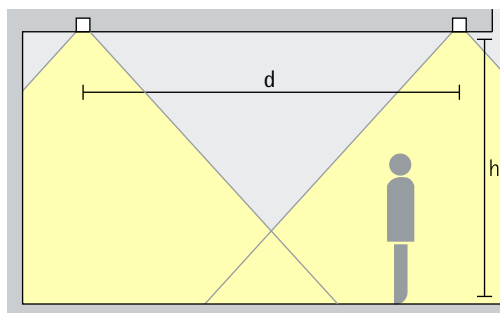


### Linear lighting

For linear arrangements and uniform lighting, the approximate distance (d) between two Iku downlights may be up to 1.5 times the height (h) of the luminaire above the working plane.


Arrangement:  $d \leq 1.5 \times h$

Area of application: covered traffic routes

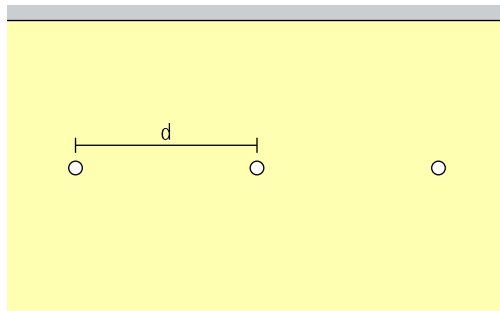

## Iku Recessed luminaires – Luminaire arrangement


### Lens wallwashers Wallwash

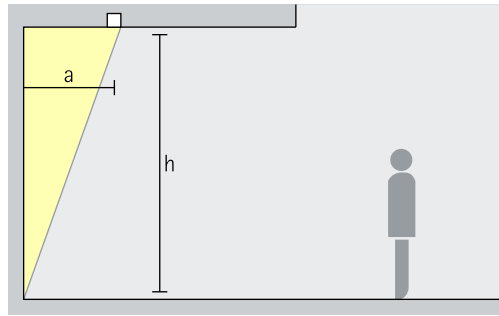

### Wallwashing

For uniform vertical lighting, the distance to the wall (a) of Iku lens wallwashers should be around one third the room height (h).

Arrangement:  $a = 1/3 \times h$

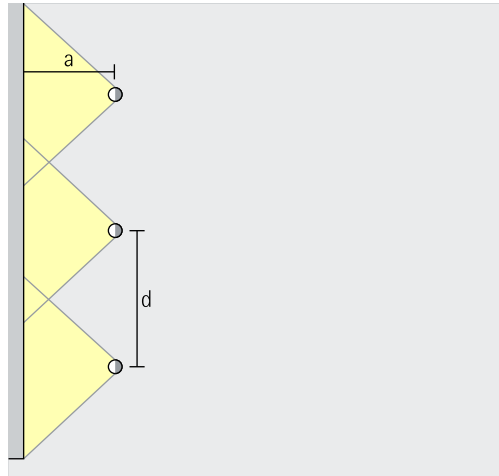


For good longitudinal uniformity, the distance (d) of Iku lens wallwashers may be up to 1.3 times the distance to the wall (a).


Arrangement:  $d \leq 1.3 \times a$

Iku Recessed luminaires

Construction size



Size 3



Size 5

LED module  
Maximum value  
at 4000K CRI 82

4.8W/1058lm
8.7W/1786lm

16.1W/3528lm
29.1W/5952lm

Light colour

	2700K CRI 92 *		3500K CRI 92 *
	3000K CRI 82 **		4000K CRI 82
	3000K CRI 92		4000K CRI 92 *
	3000K CRI 97 ***		

	2700K CRI 92 *		3500K CRI 92 *
	3000K CRI 82 **		4000K CRI 82
	3000K CRI 92		4000K CRI 92 *
	3000K CRI 97 ***		

Light  
distribution

Downlights	Downlights oval flood
Wide flood	Oval flood
Extra wide flood	Lens wallwashers
	Wallwash

Downlights	Downlights oval flood
Wide flood	Oval flood
Extra wide flood	Lens wallwashers
	Wallwash

Control

	Switchable
	DALI
	Casambi Bluetooth

	Switchable
	DALI
	Casambi Bluetooth

Colour (housing)


	Silver
--	--------

	Silver
--	--------

Colour  
(anti-glare cone)

	Silver		10,000 colours *
	Black		

	Silver		10,000 colours *
	Black		

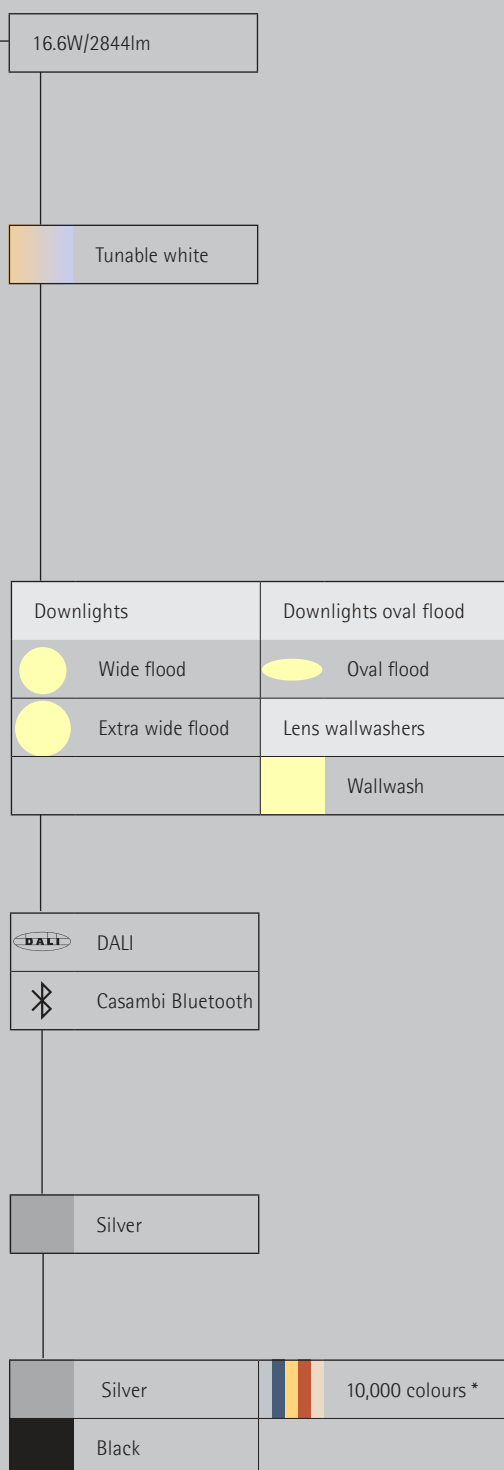

\* available on request

\*\* only for Wide flood, Extra wide flood and Oval flood distribution

\*\*\* only for wallwash distribution


Article numbers and planning data:  
[www.erco.com/029201](http://www.erco.com/029201)

Design and application:  
[www.erco.com/iku-o](http://www.erco.com/iku-o)



Iku Recessed luminaires

Construction size



Size 7

LED module  
Maximum value  
at 4000K CRI 82

24.2W/5292lm
37.1W/7740lm

24.9W/4266lm
--------------

Light colour

	2700K CRI 92 *		3500K CRI 92 *
	3000K CRI 82 **		4000K CRI 82
	3000K CRI 92		4000K CRI 92 *
	3000K CRI 97 ***		

	Tunable white
--	---------------

Light  
distribution

Downlights	Downlights oval flood
Wide flood	Oval flood
Extra wide flood	Lens wallwashers
	Wallwash

Downlights	Downlights oval flood
Wide flood	Oval flood
Extra wide flood	Lens wallwashers
	Wallwash

Control

	Switchable
	DALI
	Casambi Bluetooth

	DALI
	Casambi Bluetooth

Colour (housing)

	Silver
--	--------

	Silver
--	--------

Colour  
(anti-glare cone)

	Silver		10,000 colours *
	Black		

	Silver		10,000 colours *
	Black		



- \* available on request
- \*\* only for Wide flood, Extra wide flood and Oval flood distribution
- \*\*\* only for wallwash distribution

Article numbers and planning data:  
[www.erco.com/029201](http://www.erco.com/029201)

Design and application:  
[www.erco.com/iku-o](http://www.erco.com/iku-o)





For lighting concepts that combine the indoors and outdoors. Iku outdoor recessed luminaires. Visualisation: Electric Gobo