


## Jilly – The versatile light for modern work

### **Highly efficient and standard-compliant office workplace lighting – with track as a flexible basis.**

In keeping with modern, dynamic working environments in which office layouts are constantly changing and adapting, Jilly achieves the efficient and standard-compliant lighting of workplaces. The flat housing and a striking anti-dazzle louver characterize the elegant appearance. Jilly's lighting technology combines a highly efficient lens system with an anti-glare louver for visual comfort and luminous efficacy at the same

high level. The wattage and light distribution enable wide luminaire spacing for economical lighting concepts that comply to standards. Track mounting means that Jilly can be optimally aligned – always according to the arrangement of the workstations.

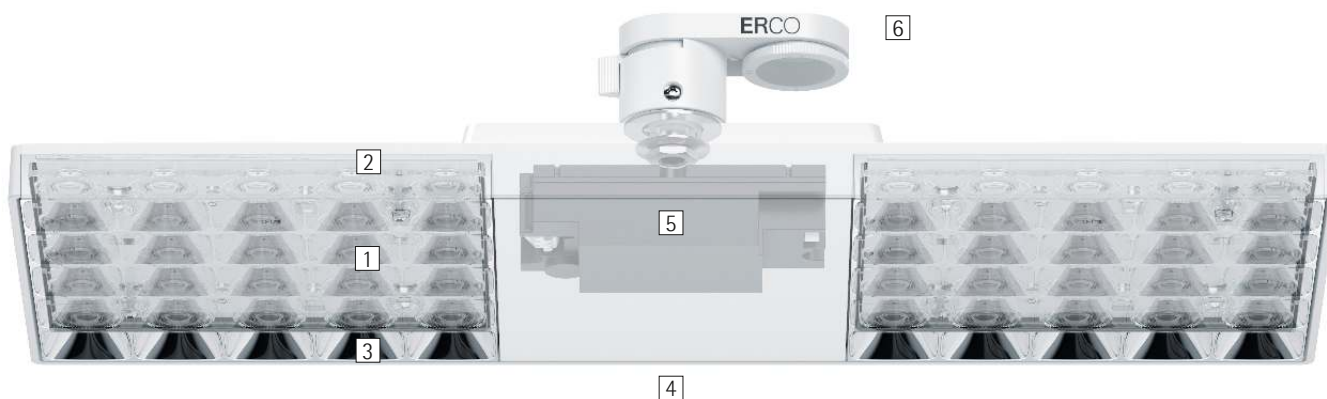

## Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

### 1 ERCO lens system

- Made of optical polymer
- Light distributions: extra wide flood or oval wide flood

### 2 ERCO LED module

- Mid-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)

### 3 Louvre

- Polymer, black lacquered or aluminum vaporized, silver, specular

### 4 Housing

- White (RAL9002), black or silver
- Polymer, coated
- Rotatable through 360° on adapter

### 5 Control gear

- Trailing edge dimmable+On-board Dim
- Dimming with external dimmers (trailing edge) possible and rotary control for brightness control on the luminaire

### 6 ERCO turning adapter for 2-circuit track

#### Variants on request

- Anti-glare louvre: gold matt, silver matt, champagne matt or copper matt-coated and other colors
- Housing: 10,000 further colors

Please contact your ERCO consultant.




Design and application:  
[www.erco.com/jilly-t](http://www.erco.com/jilly-t)

## Jilly for 2-circuit track



### Louvres for efficient visual comfort

A louvre is designed to restrict the view into the luminaire, achieving efficient visual comfort with an emission angle of 90°. An anti-glare louvre available in black or silver enables the luminaire to blend with the material and color of the ceiling.



### Low construction height

Luminaires with a flat housing have an elegant appearance and direct the focus on the light. Flat luminaires are especially advantageous for low room heights.

### Special characteristics



Improved visual comfort



Low construction height



ERCO mid-power LEDs



Efficient lens system



Different light distributions



Excellent thermal management



EMC-optimized



Various housing colors




Easy installation



Trailing edge dimmable + On-board Dim

## Jilly for 2-circuit track – Luminaire arrangement

### Downlights Extra wide flood

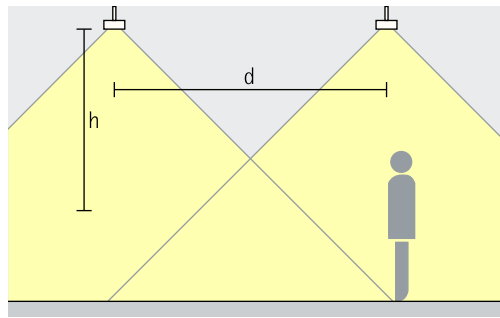


#### General lighting

As an approximate luminaire distance ( $d$ ) between two luminaires, the height ( $h$ ) of the luminaire above the working plane can be used. The intersecting beams produce excellent uniformity. The recommended offset from the wall is half the luminaire spacing.

Rough guide:  $d \leq 1.5 \times h$

Application area: as ambient lighting in the room and as flexible illumination of office workplaces.

### Downlights oval wide flood Oval wide flood

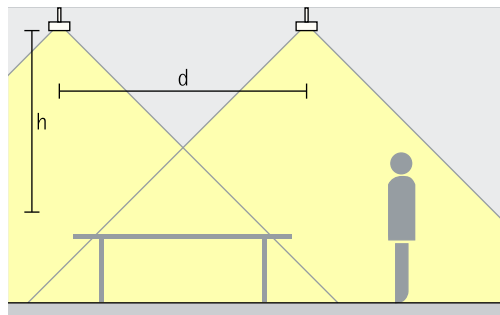


#### General lighting

To achieve a high level of uniformity and good facial recognition when illuminating office workstations, up to 1.5 times the height ( $h$ ) of the luminaire above the working plane can be used for the spacing ( $d$ ) between two luminaires. The intersecting beams produce excellent uniformity. The recommended offset from the wall is half the luminaire spacing.

Rough guide:  $d \leq 1.5 \times h$

Application area: flexible lighting for office workplaces.

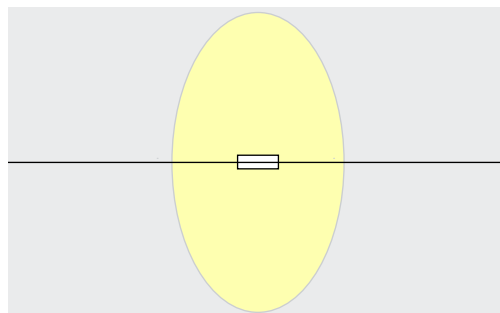


Jilly, with oval wide flood distribution of light transverse to the luminaire, orients itself to luminaire alignment as highly proven for office applications.

De Krakeling  
(Wereldhave),  
Amsterdam. Archi-  
tecture: Kodde  
Architecten,  
Amsterdam.  
Interior design:  
Casper Schwarz  
Architects. Light-  
ing design:  
Casper Schwarz  
Architects. Pho-  
tography: Lukas  
Palik.



Jilly for 2-circuit track







Construction size 15 13/16"





LED module  
Maximum value  
at 4000K CRI 82

9.3W/2095lm

Light color

	2700K CRI 92		3500K CRI 92
	3000K CRI 82		4000K CRI 82
	3000K CRI 92		4000K CRI 92





Light distribu-  
tion


Downlights	Downlights oval wide flood
 Extra wide flood	 Oval wide flood

Control

Trailing edge  
dimmable +  
On-board Dim

Color  
(housing/louvre)

	White/Silver		White/Black		10,000 colors */ Silver
	Black/Silver		Black/Black		10,000 colors */ Black
	Silver/Silver		Silver/Black		

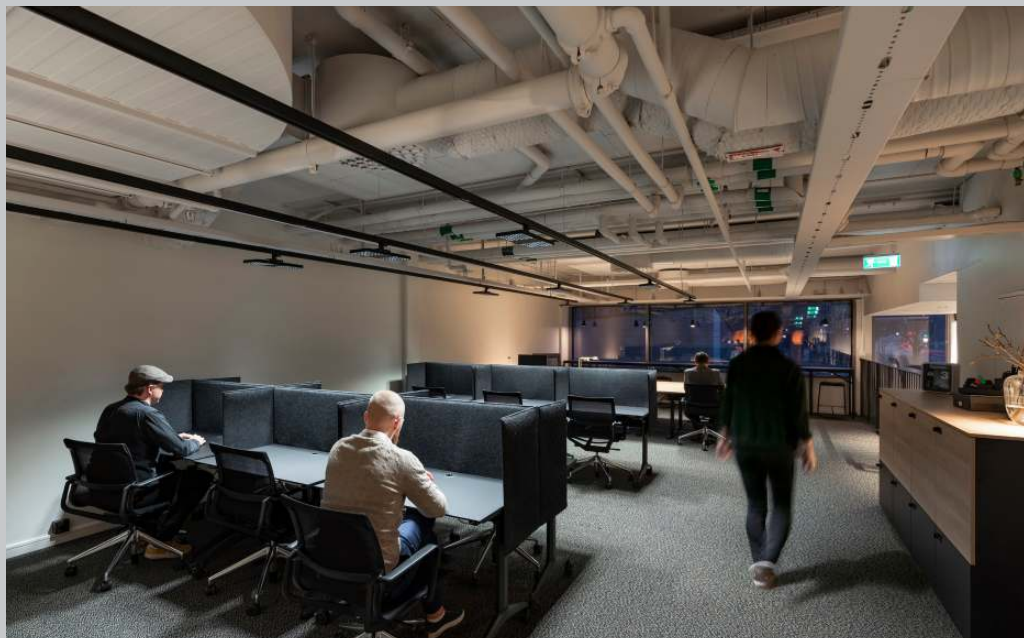

Fabege AB - WAW  
 Arena Staden,  
 Stockholm. Archi-  
 tecture: ABREU  
 Design Studio;  
 EgnellAllard Inred-  
 ningsarkitek-  
 tur, Stockholm.  
 Lighting design:  
 ABREU Design  
 Studio. Electri-  
 cal engineering:  
 Stockholms Elt-  
 jänst Lundén AB;  
 Elbolaget LMJ AB;  
 Lundek Elkonsult  
 AB; Elarkitektur  
 AB. Photography:  
 Gavriil Papadiotis,  
 London.

\* available on request

Article numbers and planning data:  
[www.erco.com/017657-us](http://www.erco.com/017657-us)

Design and application:  
[www.erco.com/jilly-t](http://www.erco.com/jilly-t)





Zaha Hadid Architects, London.  
Architecture: Zaha Hadid Architects, London. Photography: Gavriil Papadiotis.