



## Uniscan OnTrack – A minimalist and multi-talented

### **The specialist for galleries as a supplement to existing lighting installations**

Compact, flexible and easy to handle: Uniscan brings maximum quality of light to sophisticated art galleries and museums. The neutral, cylindrical shape blends into spaces of all styles, and connection via transadapter makes Uniscan compatible with many existing, dimmable lighting systems. Adaptability is a key feature of Uniscan, because every exhibition needs different light. Light distributions can be changed at any time thanks to the interchangeable

lens units. The darklight lenses give the Uniscan spotlights a magical appearance. Conversion filters as accessories adapt the spectrum. Equally versatile: dimming options and control interfaces, including wireless connectivity via Casambi Bluetooth.



#### Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

#### 1 ERCO lenses

- Made of optical polymer
- Darklight lenses: narrow spot, spot, flood, wide flood or extra wide flood
- Spherolit lenses: oval flood or wall-wash
- Zoom lenses: zoom spot; continuously focusable
- Projection lenses: narrow framing or wide framing; continuously focusable

#### 2 Lens unit

- Rotatable through 360°
- Polymer, white or black
- Contour spotlights with framing attachment

#### 3 ERCO LED-module

- High-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)
- Collimating lens made of optical polymer

#### 4 Housing and bracket

- White (RAL9002) or black
- Cast aluminium, powder-coated
- Pivotal 0°-90°
- Bracket: cast aluminium/polymer; rotatable through 360° on adapter

#### 5 Control gear

- Phase dimmable+On-board Dim, DALI dimmable or Casambi Bluetooth
- Phase dimmable + On-board Dim version: Dimming with external dimmers (trailing edge) possible and rotary control for brightness control on the luminaire

#### 6 ERCO transadapter or ERCO DALI transadapter

##### Variants on request

- Housing: 10,000 further colours
- Please contact your ERCO consultant.




Design and application:  
[www.erco.com/uniscan-ontrack](http://www.erco.com/uniscan-ontrack)

# Uniscan OnTrack for track 220-240V



**Darklight lens**  
The Darklight lens not only creates a magical impression with just one light point. It also features precise, uniform light distributions, wide flexibility in the selection of beam characteristics and state of the art efficiency.





**Zoom spotlights**  
The light beam diameter can be infinitely adjusted from spot (15°) to wide flood (65°) by simply turning the lens. Zoom spotlights are particularly suitable for illuminating areas with changing exhibits and merchandise.





**Contour spotlights**  
Framing attachments enable a sharply defined light beam. In this way fascinating effects can be created with contour spotlights, where crisply illuminated pictures appear to illuminate from within.


## Special characteristics


 Efficient darklight technology


 Zoom spotlight


 Contour spotlight


 Efficient darklight technology


 Optical cut-off 40°/50°/60°


 Different light distributions


 Oval flood, freely rotatable


 Different light colours


 Excellent thermal management


 EMC-optimised

 Various housing colours


 Various construction sizes

 Pivotable through 90°

 Accessory for maximum visual comfort

 Phase dimmable + On-board Dim


 DALI dimmable

 Casambi Bluetooth

# Uniscan OnTrack for track 220-240V – Luminaire arrangement

## Spotlights

Narrow spot, Spot, Flood

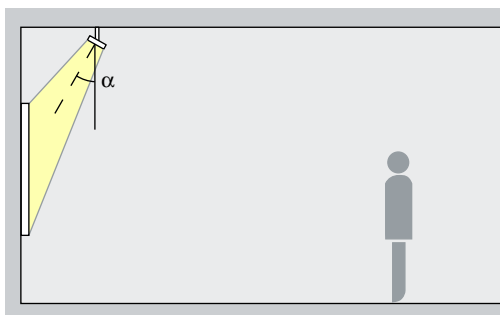


Works of art, merchandise and architectural details are effectively accentuated with Uniscan. The ideal angle of tilt ( $\alpha$ ) for this is around 30°. The object is modelled without distorting the effect as a result of excessive shadowing. It also prevents shadows cast by the observer.

Arrangement:  $\alpha = 30^\circ$

## Zoom spotlights

Zoom spot

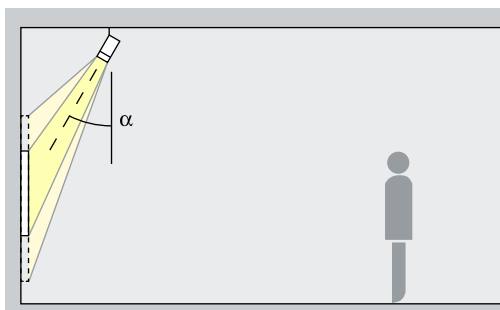


Zoom spotlights feature a continuously adjustable beam angle. With the spot to wide flood zoom range, smaller works of art can be accentuated effectively at an inclination angle ( $\alpha$ ) of approximately 30°. The object is modelled without distorting the effect as a result of excessive shadowing. It also prevents shadows cast by the observer.


Arrangement:  $\alpha = 30^\circ$

## Contour spotlights

Narrow framing, Wide framing

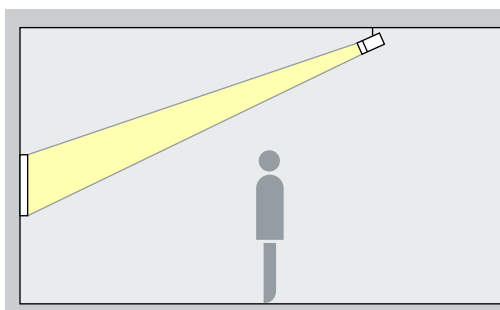


Contour spotlights generate freely adjustable, crisp-edged light beams. As a result fascinating effects can be created where pictures appear to illuminate from within. Select narrow framing to accurately illuminate small exhibits from a long distance and wide framing to accurately illuminate large exhibits from a short distance.

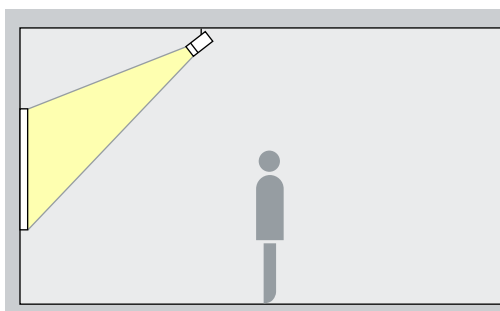

## Floodlights

Wide flood, Extra wide flood, Oval flood

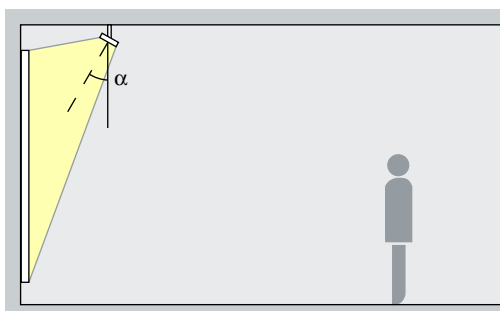


The ideal angle of tilt ( $\alpha$ ) for flood-lighting objects with a long, square shape, e.g. pictures, sculptures or merchandise displays, is around 30°.

Arrangement:  $\alpha = 30^\circ$


# Uniscan OnTrack for track 220-240V – Luminaire arrangement

Lens wallwashers  
Wallwash

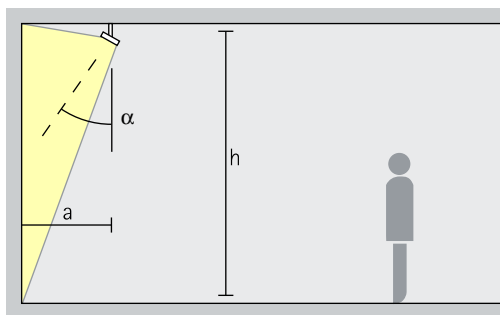

For uniform vertical lighting, the distance to the wall (a) of Uniscan lens wallwashers should be around one third of the room height (h). This results in an angle of tilt ( $\alpha$ ) of approx. 35°.

Arrangement:  $a = 1/3 \times h$  or  $\alpha = 35^\circ$

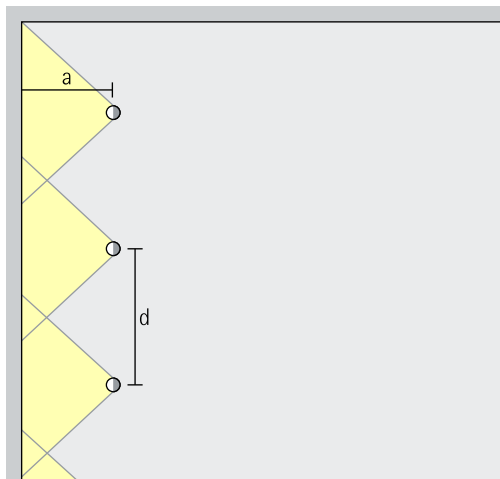


For good longitudinal uniformity, the spacing (d) of Uniscan lens wallwashers may be up to 1.5 times the distance to the wall (a).

Arrangement:  $d \leq 1.5 \times a$


Optimal wall distances and luminaire spacing values for individual products are specified in the wall-washer tables at [www.erco.com](http://www.erco.com).

# Uniscan OnTrack for track 220-240V

Size



**S**  
Ø 60mm



**M**  
Ø 92mm

**LED module**  
Maximum value at 4000K CRI 92

12.4W/1618lm	3,1W/339lm (Narrow spot)
--------------	--------------------------

21.7W/2831lm	4,2W/426lm (Narrow spot)
--------------	--------------------------

Light colour

	2700K CRI 92		3500K CRI 92
	3000K CRI 92		4000K CRI 92
	3000K CRI 97		

	2700K CRI 92		3500K CRI 92
	3000K CRI 92		4000K CRI 92
	3000K CRI 97		

Light distribution

Spotlights	Floodlights
Narrow spot	Wide flood
Spot	Extra wide flood
Flood	Oval flood
Zoom spotlights	Lens wallwashers
Zoom spot	Wallwash
Contour spotlights	
Narrow framing	
Wide framing	

Spotlights	Floodlights
Narrow spot	Wide flood
Spot	Extra wide flood
Flood	Oval flood
Zoom spotlights	Lens wallwashers
Zoom spot	Wallwash
Contour spotlights	
Narrow framing	
Wide framing	

Control

	Phase dimmable + On-board Dim
	DALI
	Casambi Bluetooth

	Phase dimmable + On-board Dim
	DALI
	Casambi Bluetooth

Colour (housing)

	White		10,000 colours *
	Black		

	White		10,000 colours *
	Black		

Accessory

	Lenses		Lens Units		Snout
	Filter		Honeycomb louvre		Barn doors

\* available on request

[www.erco.com/uniscan-ontrack](http://www.erco.com/uniscan-ontrack)





Compact, flexible and easy to handle: Uniscan brings maximum quality of light to sophisticated art galleries and museums. Visualisation: Electric Gobo