



## Optec New 48V – The durable universal talent

### **A spotlight for all situations, consistently designed for sustainability**

Durable and adaptable at the same time: the new generation of our top-selling Optec combines these characteristics to achieve maximum sustainability. Optec New 48V was developed as part of our "Lighting Durability: Service Life of 20 Years" and stands for durable, economical and sustainable lighting solutions. The proven, high-efficiency lighting technology for more lux per watt on the target surface is supplemented by a design aimed at durability thanks

to high quality components. Thanks to upgrades and updates, Optec also remains adaptable to new usage scenarios. Optec New 48V for Minirail track meets all quality of light needs in shops, galleries and museums. The system of interchangeable optics and suitable accessories provides limitless flexibility of use, now and well into the future.



## Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

### 1 ERCO lenses

- Made of optical polymer
- Spherolit lenses: narrow spot, spot, flood, wide flood, extra wide flood, oval flood or wallwash
- Zoom lenses: zoom spot; continuously focusable
- Projection lenses: narrow framing or wide framing; continuously focusable

### 2 Lens unit

- Rotatable through 360°
- Polymer, white or black
- Contour spotlights with framing attachment

### 3 ERCO LED module

- High-power LEDs: warm white (2700K or 3000K), neutral white (3500K or 4000K) or tunable white (2700-7500K)
- Collimating lens made of optical polymer

### 4 Cylindrical light head

- White (RAL9002) or black
- Cast aluminum, powder-coated
- 270° tilt

### 5 Housing

- White (RAL9002) or black
- Polymer
- Rotatable through 360° on adapter

### 6 Control gear

- On-board Dim or Casambi Bluetooth
- On-board Dim version: rotary control for control of brightness on the luminaire

### 7 ERCO Minirail adapter

#### Variants on request

- Housing: 10,000 further colors
- Please contact your ERCO consultant.




Design and application:  
[www.erco.com/optec-48V](http://www.erco.com/optec-48V)

# Optec New 48V for Minirail track



**Particularly durable**  
Optec New 120V has been designed and tested for a life cycle of about 75,000 hours. This corresponds to a service life of 20 years, presuming standard product use, compliance with maintenance intervals and a period of illumination of about ten hours per day.

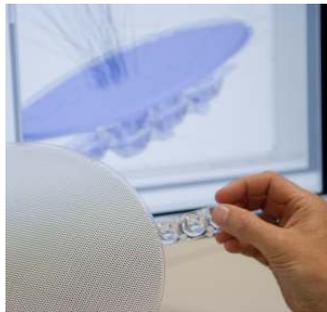

**More light on the target surface**  
The lens system, developed and manufactured in-house, precisely projects the light with no spill light. The accent lighting of the ERCO spotlight thus sets itself clearly apart from conventional spotlights.



**Tunable white technology**  
Just as the color temperature outdoors changes continuously during the day, the color temperature of the lighting can be adjusted indoors to e.g. support lighting concepts for Human Centric Lighting.



**Very good price performance ratio**  
Optec New 120V as an entry-level product offers you an attractive price-performance ratio. This is particularly interesting for lighting design tasks with economic efficiency in mind.

Special characteristics	
	Very high durability
	High-efficiency lighting technology
	Tunable white
	Very good price performance ratio

	ERCO high-power LEDs
	Efficient Spherolit technology
	Different light distributions
	Oval flood, freely rotatable
	Different light colors


	Excellent thermal management
	EMC-optimized
	Various housing colors
	Various construction sizes
	Pivotable through 270°
	Accessory for maximum visual comfort

	On-board Dim
	Casambi Bluetooth

# Optec New 48V for Minirail track – Luminaire arrangement

## Spotlights

Narrow spot, Spot, Flood

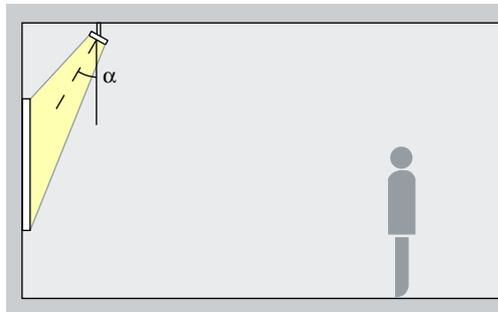


Optec spotlights accentuate artwork, products and architectural details effectively. The ideal angle of tilt ( $\alpha$ ) for this is around  $30^\circ$ . The object is modelled without distorting the effect as a result of excessive shadowing. It also prevents shadows cast by the observer.

Arrangement:  $\alpha = 30^\circ$

## Zoom spotlights

Zoom spot

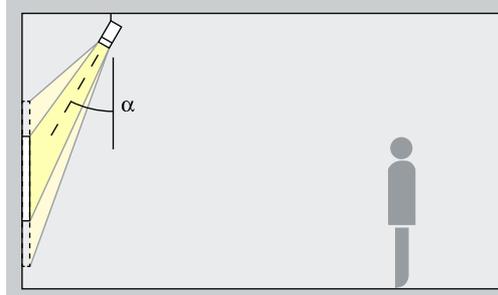


Zoom spotlights feature a continuously adjustable beam angle. With the spot to wide flood zoom range, smaller works of art can be accentuated effectively at an inclination angle ( $\alpha$ ) of approximately  $30^\circ$ . The object is modeled without distorting the effect as a result of excessive shadowing. It also prevents shadows cast by the observer.


Arrangement:  $\alpha = 30^\circ$

## Contour spotlights

Narrow framing, Wide framing

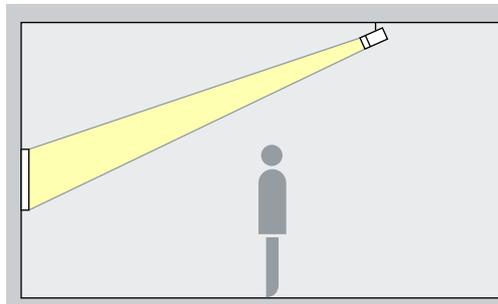


Contour spotlights generate freely adjustable, crisp-edged light beams. As a result fascinating effects can be created where pictures appear to illuminate from within. Select narrow framing to accurately illuminate small exhibits from a long distance and wide framing to accurately illuminate large exhibits from a short distance.

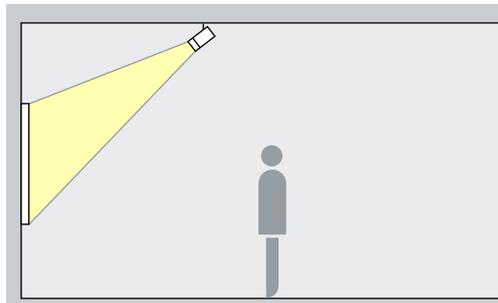

## Floodlights

Wide flood, Extra wide flood, Oval flood

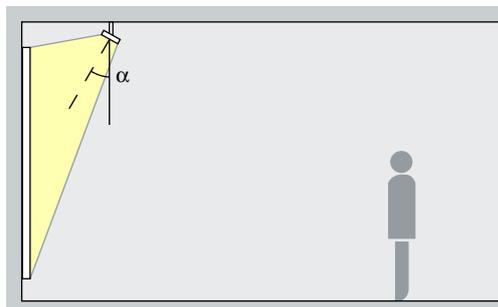


The ideal angle of tilt ( $\alpha$ ) for floodlighting objects with a long, square shape, e.g. pictures, sculptures or merchandise displays, is around  $30^\circ$ .

Arrangement:  $\alpha = 30^\circ$


# Optec New 48V for Minirail track – Luminaire arrangement

Lens wallwashers  
Wallwash

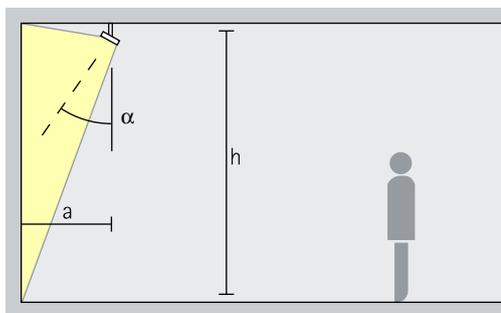

For uniform vertical illuminance, the distance (a) of Optec lens wallwashers from the wall should be around one third of the room height (h). This results in an angle of tilt (α) of approx. 35°.

Arrangement:  $a = 1/3 \times h$  or  $\alpha = 35^\circ$

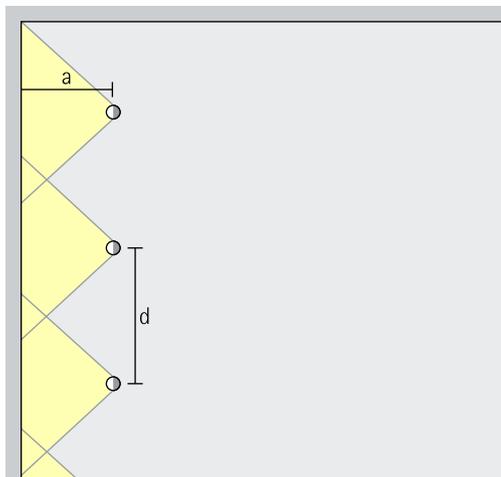


For good longitudinal uniformity, the luminaire spacing (d) of Optec wallwashers may be up to 1.5 times the distance to the wall (a).

Arrangement:  $d \leq 1.5 \times a$

Optimal wall distances and luminaire spacing values for individual products are specified in the wall-washer tables at [www.erco.com](http://www.erco.com).

# Optec New 48V for Minirail track

Size



S  
 $\varnothing$  2 3/8"

LED module  
 Maximum value at 4000K CRI 92

9.9W/1350lm	3.1W/339lm (Narrow spot)	6.9W/719lm
-------------	--------------------------	------------

Light Color

	2700K CRI 92		3500K CRI 92		Tunable white
	3000K CRI 92		4000K CRI 82		
	3000K CRI 97		4000K CRI 92		

Light distribution

Spotlights		Floodlights		Spotlights		Floodlights	
	Narrow spot		Wide flood		Spot		Wide flood
	Spot		Extra wide flood		Flood		Extra wide flood
	Flood		Oval flood	Zoom spotlights			Oval flood
Zoom spotlights		Lens wallwashers			Zoom spot	Lens wallwashers	
	Zoom spot		Wallwash	Contour spotlights			Wallwash
Contour spotlights					Narrow framing		
	Narrow framing				Wide framing		
	Wide framing						

Control


	On-board Dim		Casambi Bluetooth + 0-10V via Bridge
	Casambi Bluetooth + 0-10V via Bridge		

Color (housing)

	White		10,000 colors *
	Black		

Accessory

	Lenses		Lens Units		Snoot		Bridges/Gateways* 0-10V, DALI, DMX
	Filter		Honeycomb louvre		Barn doors		



M  
 Ø 3 5/8"

19.6W/2496m	4.2W/464 (Narrow spot)
-------------	------------------------

12.6W/1335lm
--------------

	2700K CRI 92		3500K CRI 92
	3000K CRI 92		4000K CRI 82
	3000K CRI 97		4000K CRI 92

	Tunable white
--	---------------

Spotlights		Floodlights	
	Narrow spot		Wide flood
	Spot		Extra wide flood
	Flood		Oval flood
Zoom spotlights		Lens wallwashers	
	Zoom spot		Wallwash
Contour spotlights			
	Narrow framing		
	Wide framing		

Spotlights		Floodlights	
	Spot		Wide flood
	Flood		Extra wide flood
Zoom spotlights			Oval flood
	Zoom spot	Lens wallwashers	
Contour spotlights			Wallwash
	Narrow framing		
	Wide framing		

	On-board Dim
	Casambi Bluetooth + 0-10V via Bridge

	Casambi Bluetooth + 0-10V via Bridge
--	---

	White		10,000 colors *
	Black		

	White		10,000 colors *
	Black		

\* available on request

