



Parscan – Systematic diversity

The elegant and universal spot-light system for museums and shops

Light, not luminaires—this is the foundation on which the sleek, cylindrical shape of Parscan is modelled. Different lighting solutions can be implemented efficiently thanks to precise and flexible photometrics. If the spotlight is directed vertically downwards as a downlight, the support bracket merges into the cylindrical shape. With its black housing, compact shape and a luminaire head that barely swivels out when rotated or tilted, the Parscan is also ideal for

mounting in ceiling channels. The excellent glare control enhances visual comfort even in challenging lighting situations. Displaying a minimalist design, the luminaire appears unobtrusive in museums, shops or places of worship.

Parscan for 2-circuit track



Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

1 ERCO Spherolit lens

- Light distributions: narrow spot, spot, flood, wide flood, extra wide flood, oval flood or wallwash
- Oval flood 360° rotation

or

Attachment (zoom spotlight)

- Zoom lens, continuously focusable
- Light distributions: zoom spot

2 ERCO LED-module

- High-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)
- Collimating lens made of optical polymer

3 Housing and bracket

- White (RAL9002) or black
- Cast aluminum, powder-coated
- 0°-90° tilt
- Bracket on adapter rotatable through 360°

4 Control gear

- Trailing edge dimmable+On-board Dim
- Dimming with external dimmers (trailing edge) possible and rotary control for brightness control on the luminaire

5 ERCO turning adapter for 2-circuit track

Variants on request

- Housing: 10,000 further colors
- Please contact your ERCO consultant.




Design and application:
www.erco.com/parscan

Parscan for 2-circuit track



Large lumen packages for very high illuminances
 The attention of the viewer can be focused via contrasting accents. ERCO has high-performance luminaires with large lumen packages in its range for this purpose.

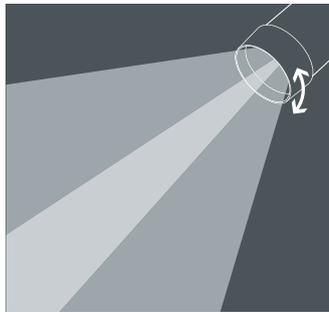

Zoom spotlights
 The light beam diameter can be infinitely adjusted from spot (15°) to wide flood (65°) by simply turning the lens. Zoom spotlights are particularly suitable for illuminating areas with changing exhibits and merchandise.



Oval flood freely rotatable
 The oval flood Spherolit lens can be freely rotated with round luminaire heads to optimally match the lighting to various objects.



Small luminaire dimensions
 Small luminaires are discreet and place the focus on the light itself. Compact luminaire dimensions are particularly advantageous with small rooms.



Ideal for ceiling channels
 The minimalist design of Parscan is suitable for situations in which the luminaire should appear as discreet as possible - for example in museums or shops. If the luminaires are integrated into the ceiling channel they remain almost completely concealed.

Special characteristics	
	Large lumen packages for very high illuminances
	Zoom spotlight
	Oval flood, freely rotatable
	Small luminaire dimensions
	Ideal for ceiling channels

	ERCO high-power LEDs
	Efficient Spherolit technology
	Different light distributions
	Different light colors


	Excellent thermal management
	EMC-optimized
	Various housing colors
	Various construction sizes
	Pivotable through 90°
	Accessory for maximum visual comfort

Trailing edge dimmable + On-board Dim

Parscan for 2-circuit track – Luminaire arrangement

Spotlights

Narrow spot, Spot, Flood

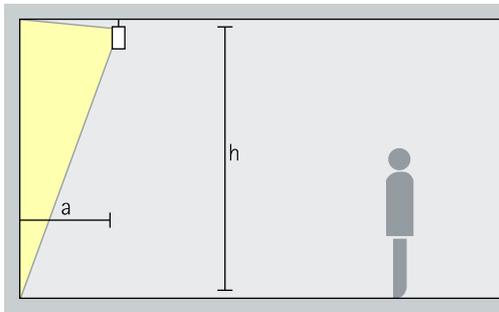


Parscan spotlights accentuate artwork, products and architectural details effectively. The ideal angle of tilt (α) for this is around 30° . The object is modelled without distorting the effect as a result of excessive shadowing. It also prevents shadows cast by the observer.

Arrangement: $\alpha = 30^\circ$

Zoom spotlights

Zoom spot

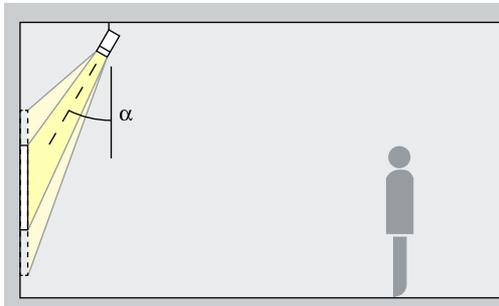


Zoom spotlights feature a continuously adjustable beam angle. With the spot to wide flood zoom range, smaller works of art can be accentuated effectively at an inclination angle (α) of approximately 30° . The object is modeled without distorting the effect as a result of excessive shadowing. It also prevents shadows cast by the observer.

Arrangement: $\alpha = 30^\circ$

Floodlights

Wide flood, Extra wide flood, Oval flood

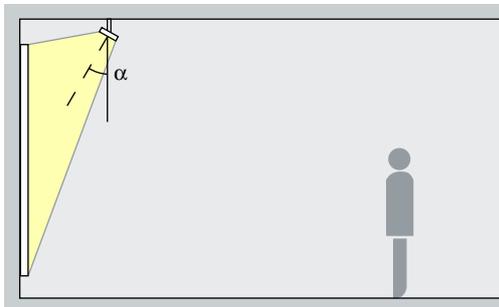


The ideal angle of tilt (α) for floodlighting objects with a long, square shape, e.g. pictures, sculptures or merchandise displays, is around 30° .

Arrangement: $\alpha = 30^\circ$


Lens wallwashers

Wallwash

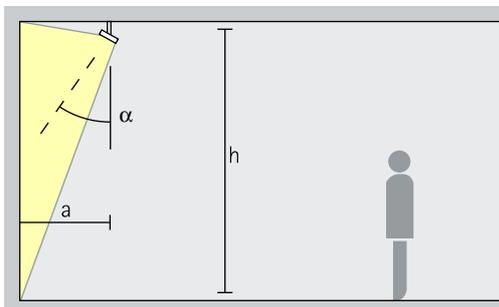

For uniform vertical illuminance, the distance (a) of Parscan lens wallwashers from the wall should be around one third of the room height (h). This results in an angle of tilt (α) of approx. 35° .

Arrangement: $a = 1/3 \times h$ or $\alpha = 35^\circ$

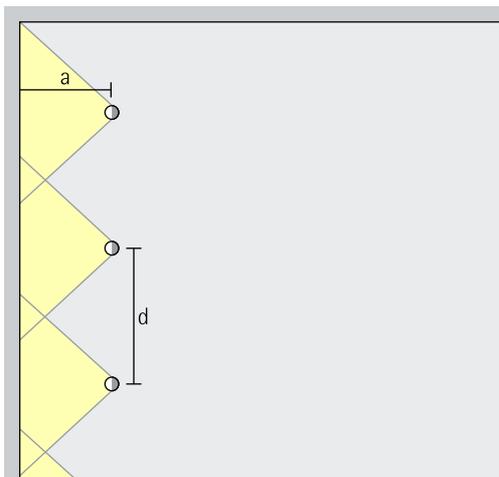

For good longitudinal uniformity, the luminaire spacing (d) of Parscan wallwashers may be up to 1.2 times the distance to the wall (a).

Arrangement: $d \leq 1.2 \times a$

Optimal wall distances and luminaire spacing values for individual products are specified in the wall-washer tables at www.erco.com.


Büro Zington,
Stockholm.
Lighting design:
Joaquim de Abreu,
Abreu Design Stu-
dio, Stockholm.
Photography:
Johan Elm, Stock-
holm.




Palazzo Massimo,
Rome. Lighting
design: Arch.
Francesca Storaro,
Castel Gandolfo.

Parscan for 2-circuit track

Construction size

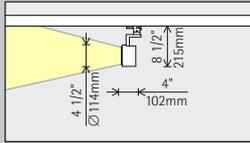

Ø 4 1/2"

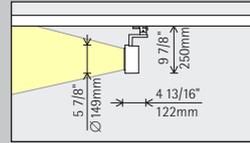

Ø 5 7/8"

LED module
Maximum value at 4000K CRI 92

12.1W/1723lm	4W/574lm (Narrow spot)
--------------	------------------------

24.3W/3446lm	8.1W/1149lm (Narrow spot)
--------------	---------------------------

Light color

	2700K CRI 92		3500K CRI 92
	3000K CRI 92		4000K CRI 92
	3000K CRI 97		



	2700K CRI 92		3500K CRI 92
	3000K CRI 92		4000K CRI 92
	3000K CRI 97		

Light distribution

Spotlights		Floodlights	
	Narrow spot		Wide flood
	Spot		Extra wide flood
	Flood		Oval flood
Zoom spotlights		Lens wallwashers	
	Zoom spot		Wallwash

Spotlights		Floodlights	
	Narrow spot		Wide flood
	Spot		Extra wide flood
	Flood		Oval flood
		Lens wallwashers	
			Wallwash

Control




Color (housing)

	White		10,000 colors *
	Black		

	White		10,000 colors *
	Black		

Accessories

	Lenses		Cross-baffle
	Snoots		Honeycomb anti-glare screen

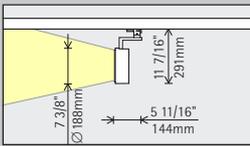

Ø 7 3/8"

48.5W/6893lm	18.2W/2585lm (Narrow spot)
--------------	----------------------------

	2700K CRI 92		3500K CRI 92
	3000K CRI 92		4000K CRI 92
	3000K CRI 97		

Spotlights		Floodlights	
	Narrow spot		Wide flood
	Spot		Extra wide flood
	Flood		Oval flood
		Lens wallwashers	
			Wallwash

Trailing edge dimmable + On-board Dim

	White		10,000 colors *
	Black		

* available on request





Buckford Illumination Group, Melbourne.
Architecture and lighting design:
Buckford Illumination Group.
Photography:
Jackie Chan, Sydney.