

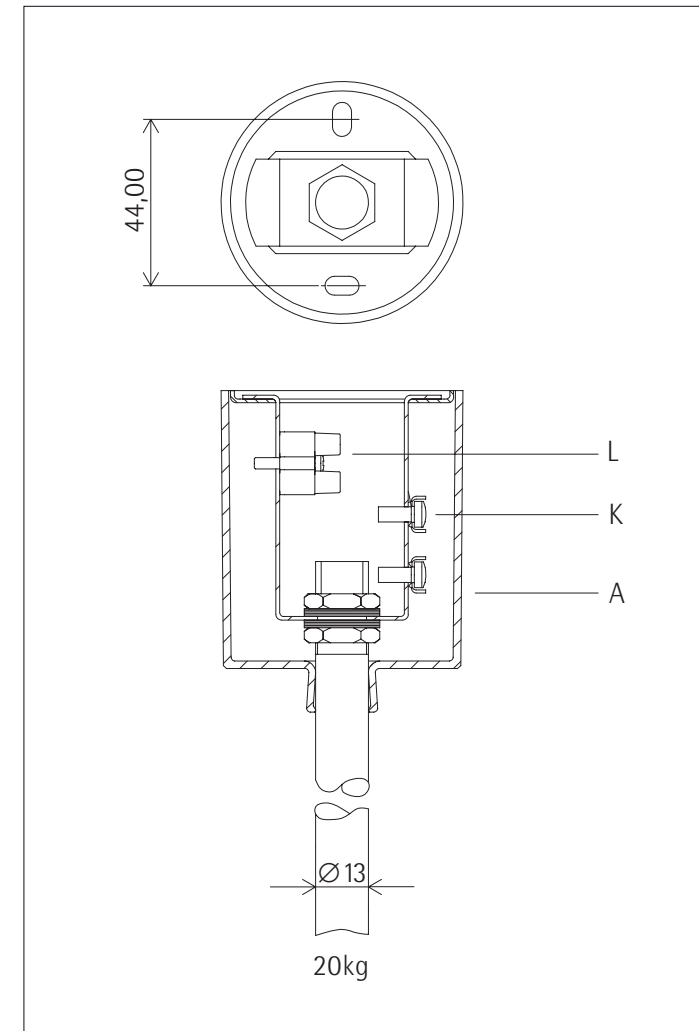
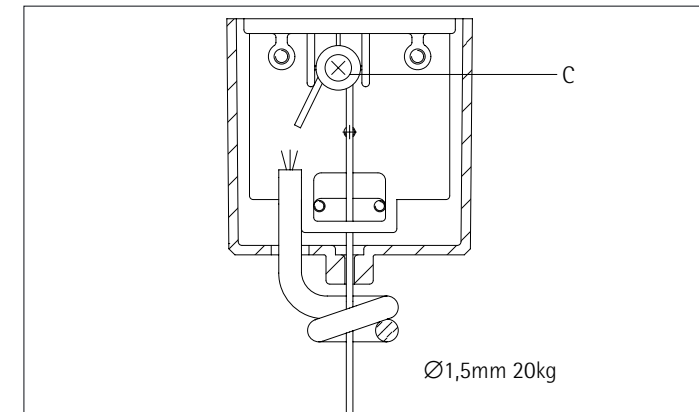
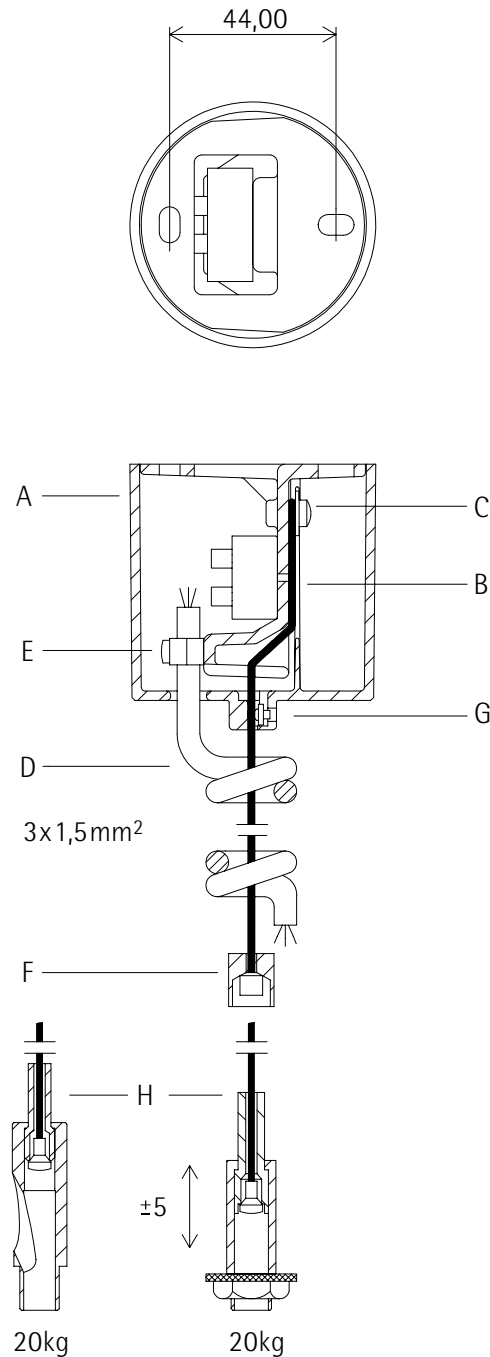


Suspensions

Installation Instructions

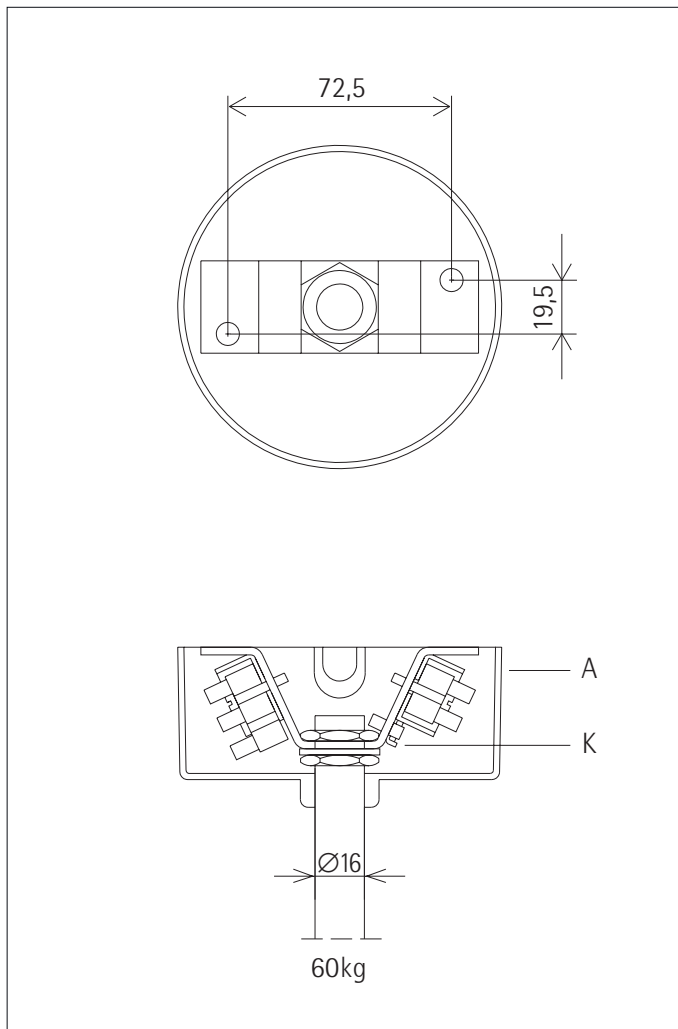

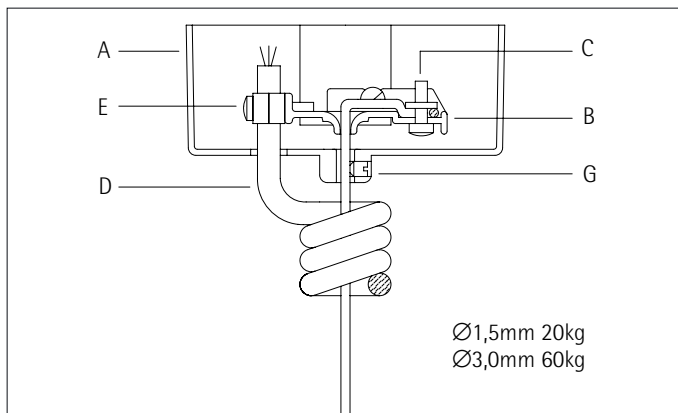

English

When installing, always observe the national installation and accident prevention regulations.

Wire Rope Suspensions

1. Secure backplate to ceiling.
2. Insert wire rope through hole in canopy "A" and fix to wire rope carrier "B" with screw "C".
3. Coil connection cable "D" around wire rope or insert directly through the aperture in canopy "A". Secure strain relief "E".
4. Install dowel "F" in the hole in a connector or the mounting bush of the tube or panel system. Tighten the lateral grub screws to at least 1.6Nm. Wire rope suspension with dowel "H" is fixed directly to a connector or a profile of the tube or panel system. After releasing screw "C" the height adjustment can be carried out.
5. Make the electrical connection. Secure canopy "A" by securing screw "G" on the wire rope.

Pendent tube suspension

1. Make ceiling fixings.
2. Pendent tube Ø 13mm: use 5 x 1.5mm² single cores. Disconnect terminal block "L". Make the electric connection. Reconnect terminal block "L".
3. Pendent tube Ø 16mm: use 5 x 1.5mm² plastic-coated cable. Make the electric connection.
4. Make protective conductor connection at screw "K".

Cleaning

The luminaire must be switched-off and cool before being cleaned.

Note: Regular cleaning is essential. The interval and method will depend on the mounting location, the mounting situation and ambient conditions.

Cleaning of luminaires

A dampened soft cloth is to be used.

Cleaning of plastics

Use a soft cloth and a standard pH-neutral, alcohol free non-scouring detergent.

Cleaning of reflectors

Use a soft cloth and a standard pH-neutral, non-scouring detergent.

Note

Our continually updated product documentation can be accessed at www.erco.com/download.