

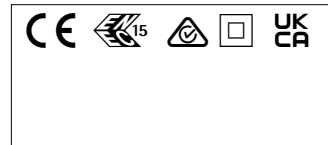

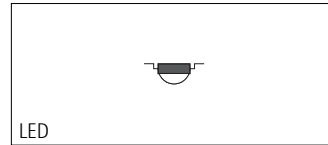
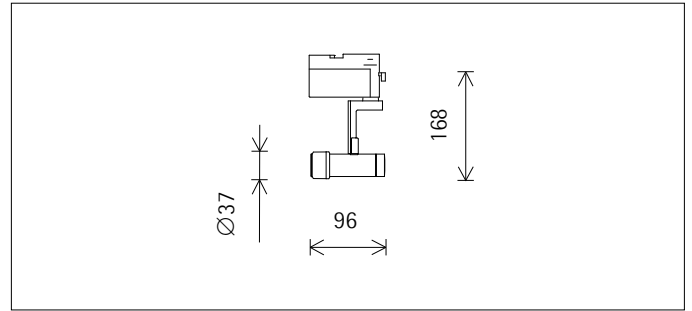


with transadpter

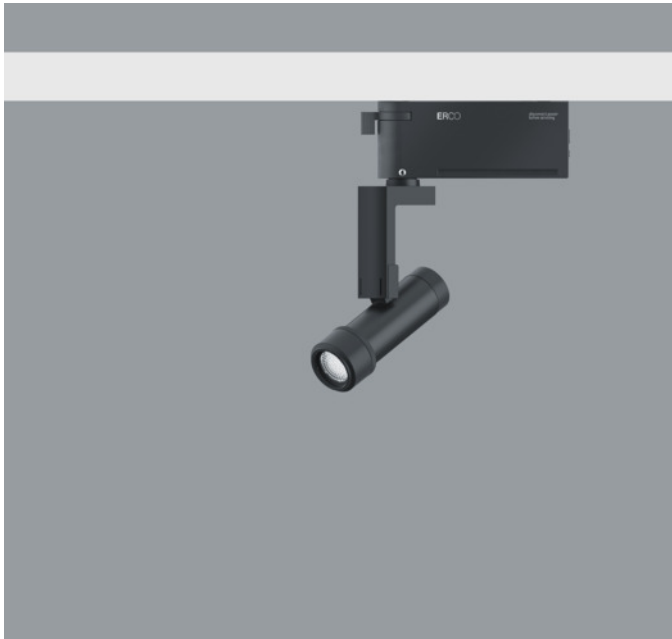


A1040316 Black
 LED module: 2W 272lm 4000K neutral white
 Casambi Bluetooth
 Version 1
 Size XS
 Zoom lens spot

Product description
 Housing: Zinc die-cast, powder-coated; can be swivelled through 90° on the bracket. Upper cover made of polymer.
 Bracket: polymer; can be rotated through 360° on the adapter.
 Transadpter for ERCO 220-240V track: polymer, black.
 ERCO Casambi control gear.
 LED module: high-power LEDs. Collimating lens made of optical polymer.
 Lens unit: polymer, black. Zoom lens made of optical polymer, infinitely variable focus.
 Control via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices or "Casambi Ready" products.
 Protection Class II
 Weight 0.40kg



h(m)	E(lx)	D(m)
		25°
1	485	0.44
2	121	0.89
3	54	1.33
4	30	1.77
5	19	2.22



h(m)	E(lx)	D(m)
		54°
1	216	1.02
2	54	2.04
3	24	3.06
4	13	4.08
5	9	5.10

Technical data

Luminous flux of the luminaire	157lm
Connected load	4.0W
Luminaire efficacy	39lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 82
Lumen maintenance (LED manufacturer specifications)	L90/B10 ≤50000h L90 ≤100000h
LED failure rate	0.1% ≤50000h
Dimming range	0.1%-100%
Dimming method	CCR
LMF	E
Standby power per control gear	0.4W
Luminaires per circuit breaker B16	260



Mounting
 ERCO 3-circuit track
 Hi-trac 3-circuit track

For your regional contact in the ERCO
 Sales network click here
www.ercos.com/contact

Technical Region: 220-240V 50/60Hz
 We reserve the right to make technical and design changes.
 Edition: 28.01.2023
 Current version under
www.ercos.com/A1040316

Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
A1040316 (direct)	4000K CRI 82	0.68	0.62

MR Melanopic ratio according to DIN SPEC 5031-100-100:2015-08: "amel;v"

MDER Melanopic daylight equivalent ratio according to DIN SPEC 5031-100-100:2015-08: "amel;D65;v"

Multiplying the melanopic ratio MR with the illuminance gives the equivalent melanopic illuminance EML (equivalent melanopic lux). The equivalent illuminance with daylight (D65) is obtained by multiplying the illuminance by the melanopic daylight equivalent ratio MDER.

Cleaning (a)	1				2				3			
	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79
RSMF	0.99	0.97	0.95	0.92	0.98	0.97	0.95	0.92	0.98	0.97	0.95	0.92

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
	LLMF	1.00	0.99	0.98	0.96	0.94	0.92
LSF	1	1	1	1	1	1	1

- MF LMFxRSMFxLLMFxLSF
- MF Maintenance Factor
- LMF Luminaire Maintenance Factor
- RSMF Room Surface Maintenance Factor
- LLMF Lamp Lumens Maintenance Factor
- LSF Lamp Survival Factor
- P Room pure
- C Room clean
- N Room normal
- D Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class E
 Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 696715
 Model identifier: 3000053601
 Download data sheets for control gear and disassembly instructions at www.erco.com/slr


Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN 13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources


All technical data is subject to industry-standard tolerances.
 Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols


Accessories



AC002083
 Lens unit spot
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Spherolit lens made of optical polymer.




AC002085
 Lens unit wallwash
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Spherolit lens made of optical polymer.




AC002081
 Lens unit flood
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Spherolit lens made of optical polymer.




AC002118
 Lens unit zoom spot
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Zoom lens made of optical polymer, infinitely variable focus.




AC002059
 Lens unit wide flood
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Spherolit lens made of optical polymer.




AC002117
 Lens unit zoom oval
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Zoom lens made of optical polymer, infinitely variable focus.




AC002082
 Lens unit extra wide flood
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Spherolit lens made of optical polymer.




AC006014
 Softening lens
 Filter holder: polymer, black, rotatable through 360°. Replacement without tools.




AC002070
 Lens unit oval flood
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Spherolit lens made of optical polymer.



AC006027
 Sculpture lens
 Filter holder: polymer, black, rotatable through 360°. Replacement without tools.




AC002107
 Lens unit oval wide flood
 Polymer, black lacquered, rotatable through 360°. Replacement without tools.
 Spherolit lens made of optical polymer.




AC006022
 Cold Filter
 Filter holder: polymer, black, rotatable through 360°. Replacement without tools.


Accessories




AC006020
Cold Filter Plus
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.




AC006019
Bread and Pastry Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.



AC006018
Warm Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.




AC006015
Blue Light Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.




AC006016
Warm Filter Plus
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.




AC001012
Snoot
Polymer, black.




AC006017
Skintone Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.




AC004027
Honeycomb anti-glare screen
Black




AC006024
Fish Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.



AC007001
DALI Casambi Gateway
Enables DALI systems to be connected to luminaires, sensors and control units with Casambi Bluetooth. The gateway can only be operated in Evolution networks. Power is supplied exclusively via the DALI bus. Connection via two lines which must be designed for mains voltage. The gateway requires no DALI addresses, the devices appear as non-configured devices in the DALI system. Addressing/commissioning is performed via the DALI control. It can individually control 64 devices, and via the broadcast command up to 249 devices.
CE



AC006021
Marbled Meat Filter
Filter holder: polymer, black, rotatable through 360°. Replacement without tools.



Accessories

**55249.000**

ERCO Casambi motion detector with light sensor for ERCO 220-240V track.

Setup via Casambi app (Android/iOS) with Bluetooth Low Energy (BLE)-capable mobile devices.

Use for daylight-dependent light control with or without motion detector.

Detection range of infrared (PIR) sensor 100°/ 5m. At 3m room height, this is a circle with diameter of approx. 7m.

3-phase adapter for ERCO 220-240V track: polymer, black.

Black

Weight 0.18kg

