



## Iku – for track

### **Versatile and efficient downlight for track**

How to complete lighting concepts with track: Iku downlights provide for convenient, efficient and flexible general lighting. Iku housing's rounded contours combine two lens optics that are radiating vertically downwards as well as the control gear. A design that is a perfect fit with cylindrically shaped spotlights such as Optec; and a solution that is as economical as it is sustainable. The advanced and efficient lighting technology saves energy, and the construction is designed for a service life of at

least 20 years in line with our Lighting Durability specifications. Iku maintains long-term flexibility with its ability to be freely positioned on the track, its interchangeable lenses for three different light distributions and digital connectivity.



#### Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

#### 1 ERCO Fresnel lenses

- Made of optical polymer
- Light distributions: wide flood, extra wide flood or oval flood
- Oval flood adjustable through 90°

#### 2 ERCO LED-module

- Mid-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)
- Collimating lens made of optical polymer

#### 3 Anti-glare cone

- Silver-coated or black

#### 4 Housing

- White (RAL9002), black or silver
- Cast aluminium, powder-coated
- Rotatable through 360° on adapter
- bottom cover made of polymer

#### 5 Control gear

- On-board Dim, DALI dimmable or Casambi Bluetooth
- On-board Dim version: rotary control for control of brightness on the luminaire

#### 6 ERCO 3-circuit adapter or ERCO DALI adapter

#### Variants on request


- Housing: 10,000 further colours
  - Anti-glare cone: gold matt, silver matt, champagne matt or copper matt-coated and other colours
- Please contact your ERCO consultant.



Design and application:  
[www.erco.com/iku-t](http://www.erco.com/iku-t)



**Elegant light emission**  
The special geometry of the lens ensures a uniformly illuminated light opening with high visual comfort.



**General lighting with efficiency boost**  
High system luminous efficacy is a prerequisite for funding schemes in many countries. ERCO track downlights are available with a luminous efficacy of over 100lm/W.



**Swap lenses in no time at all**  
Change the light distributions in a few simple steps by replacing the lenses. For example, change your lighting from round to oval light cones.



**Perfect in combination with round spotlights**  
Track downlights with a round design can be perfectly combined with round spotlights and wallwashers: for holistic lighting concepts from the track.

**Special characteristics**

- Improved visual comfort
- >100lm/W
- Change light distribution without the use of tools
- Perfect in combination with round spotlights

- ERCO mid-power LEDs
- Different light colours


- Excellent thermal management
- EMC-optimised
- Various housing colours
- Easy installation

- On-board Dim
- DALI dimmable
- Casambi Bluetooth

## Iku for track 220-240V – Luminaire arrangement

### Downlights

Wide flood, Extra wide flood

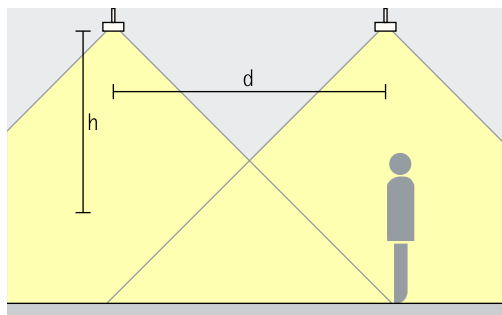

### General lighting


As an approximate luminaire distance ( $d$ ) between two luminaires, the height ( $h$ ) of the luminaire above the working plane can be used. The intersecting beams produce excellent uniformity. The recommended offset from the wall is half the luminaire spacing.

Rough guide:  $d \leq 1.5 \times h$

Application area: as ambient lighting in the room and as flexible illumination of office workplaces.

### Downlights oval flood

Oval flood

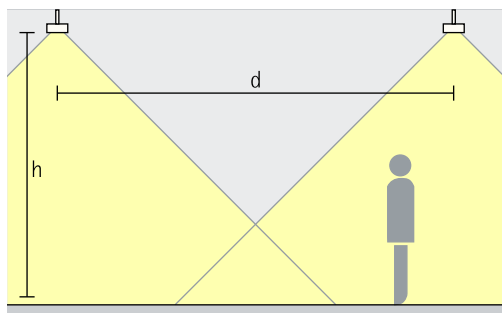

### Linear lighting

Mounted in a row, the oval beams generate linear illumination, for example for circulation areas in the office or for hallways. As an approximate luminaire distance ( $d$ ) between two luminaires, 1.5 times the height ( $h$ ) of the luminaire above the working plane can be used.


Rough guide:  $d \leq 1.5 \times h$

Thanks to the freely rotatable lens, the oval light distribution can be flexibly aligned.



# Iku for track 220-240V

Construction size 280mm



LED module  
Maximum value  
at 4000K CRI 82

19.3W/3236lm

Light colour

	2700K CRI 92		3500K CRI 92
	3000K CRI 82		4000K CRI 82
	3000K CRI 92		4000K CRI 92

Light distribution

Downlights		Downlights oval flood	
	Wide flood		Oval flood
	Extra wide flood		

Control

	On-board Dim
	DALI
	Casambi Bluetooth

Colour (housing)

	White		Silver
	Black		10,000 colours *

Colour (anti-glare cone)

	Silver		10,000 colours *
	Black		

Accessories

	Lenses
--	--------

\* available on request

Article numbers and planning data:  
[www.erco.com/027473](http://www.erco.com/027473)

Design and application:  
[www.erco.com/iku-t](http://www.erco.com/iku-t)



